


2468 - SPALT

2450 x 1050 mm

one-side embossed
non repeating pattern

Textured panel

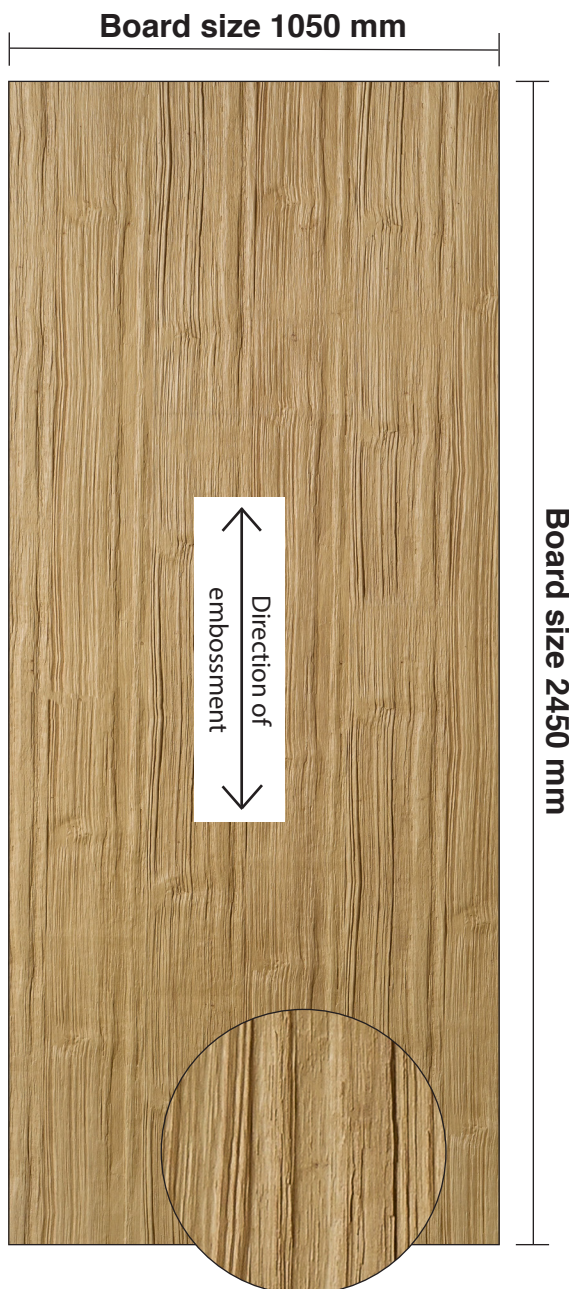

Available thicknesses



Besides the allowance of $\pm 0,3$ mm of the total area thickness referring to the highest point there are minor differences in the thickness of the embossment - about 0,2 - 0,7 mm due to the natural design specifications.

Tolerances


Height, Width	<600mm	$\pm 0,5$ mm
	>600mm	$\pm 1,0$ mm
Thickness		$\pm 0,5$ mm
Exactitude of profile		$\pm 1,5$ mm
Straightness per meter		$\pm 3,0$ mm

2468 - SPALT

2450 x 635 mm

one-side embossed
non repeating pattern

Textured panel

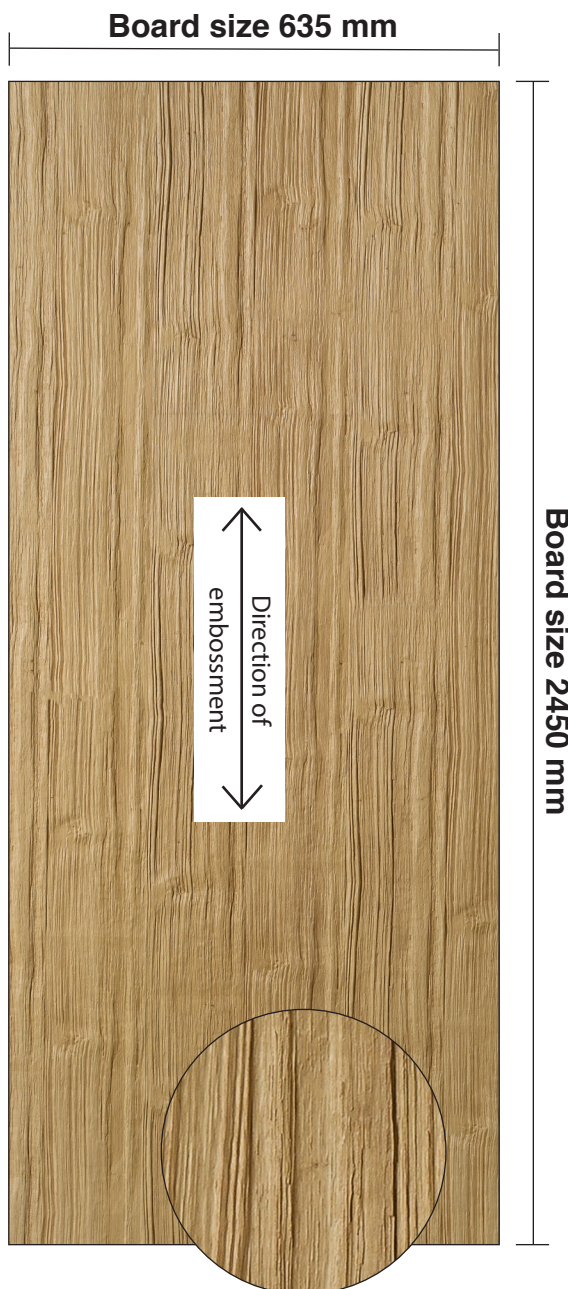

Available thicknesses



Besides the allowance of $\pm 0,3$ mm of the total area thickness referring to the highest point there are minor differences in the thickness of the embossment - about 0,2 - 0,7 mm due to the natural design specifications.

Tolerances

Height, Width	<600mm	$\pm 0,5$ mm
	>600mm	$\pm 1,0$ mm
Thickness		$\pm 0,5$ mm
Exactitude of profile		$\pm 1,5$ mm
Straightness per meter		$\pm 3,0$ mm