


2467 - BORKE

2450 x 1050 mm

one-side embossed
non repeating pattern

Textured panel

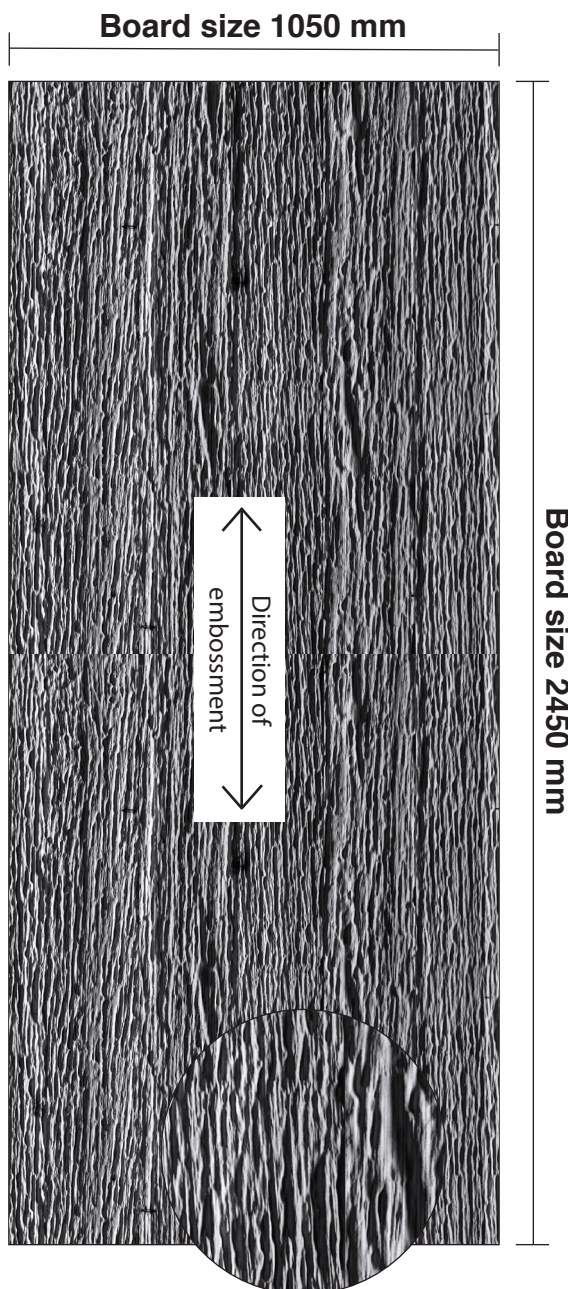

Available thicknesses

Overall thickness 21



Depth of embossment 6,4

Besides the allowance of $\pm 0,3$ mm of the total area thickness referring to the highest point there are minor differences in the thickness of the embossment - about 0,4 - 6,8 mm due to the natural design specifications.

Tolerances

Height, Width	<600mm	$\pm 0,5$ mm
	>600mm	$\pm 1,0$ mm
Thickness		$\pm 0,5$ mm
Exactitude of profile		$\pm 1,5$ mm
Straightness per meter		$\pm 3,0$ mm